


Selected operating point

Useful Heat / Disipation	Tout (°C)					Water-Water COP H+C
	150	3,7	4,9	6,0	9,6	12,8
	135	3,9	5,5	6,8	12,0	13,8
	120	4,3	6,4	9,2	14,8	-
	105	5,1	7,4	10,7	15,9	-
	90	5,5	10,1	15,3	-	-
	Tin (°C)	25	50	75	100	125
Heat source						

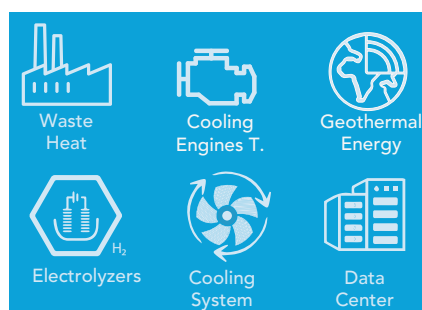


> Heat source

Heat transfer fluid	Water
Inlet temperature	125 °C
Outlet temperature	115 °C
Volumetric flow rate	40 m³/h
Thermal power	426 kWt
Pressure drop	100 kPa




< Useful heat Disipation

Heat transfer fluid	Water
Inlet temperature	130 °C
Outlet temperature	150 °C
Volumetric flow rate	23 m³/h
Thermal power	500 kWt
Pressure drop	50 kPa




> Electricity

Consumption	74 kWe
COP_H+C	12,8
COP_H	6,8
COP_C	6,1
Voltage	3x400 V

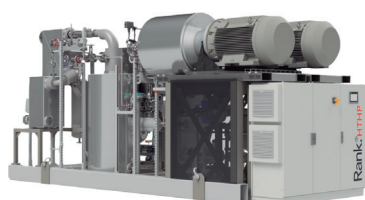


Calculation COP's

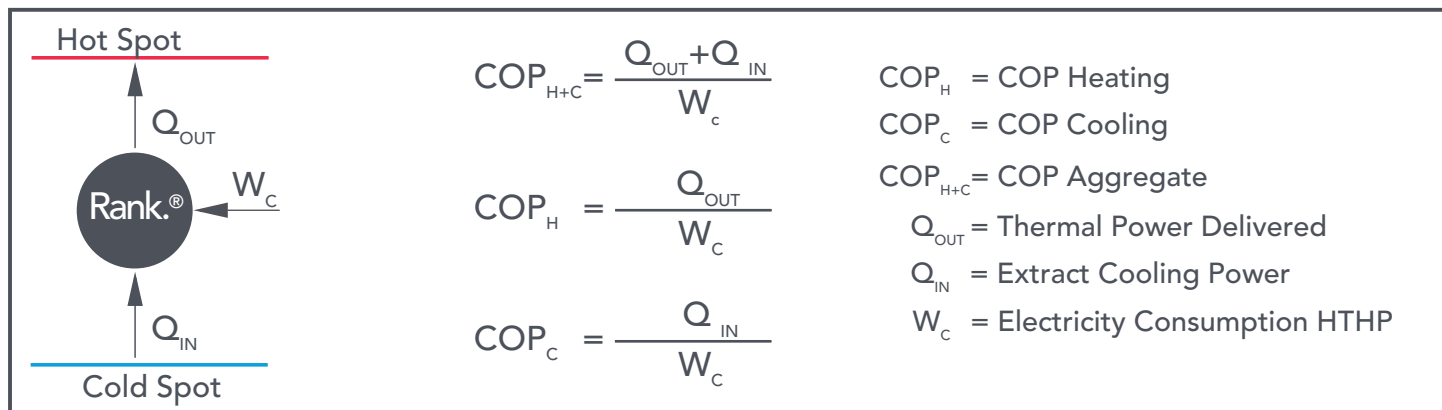


Dimensiones

Basic Option

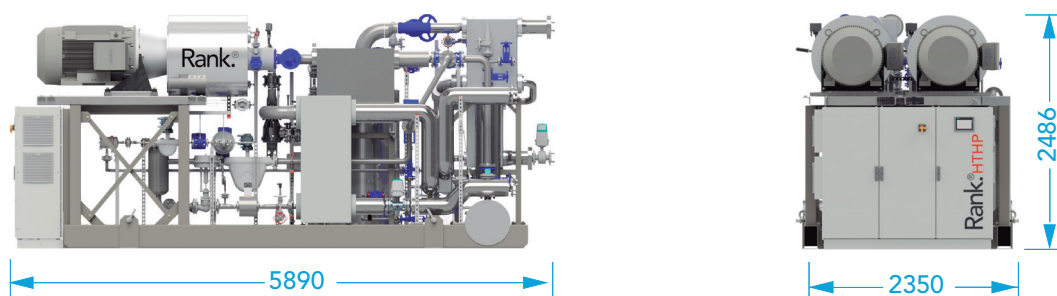

Wrap-around Option

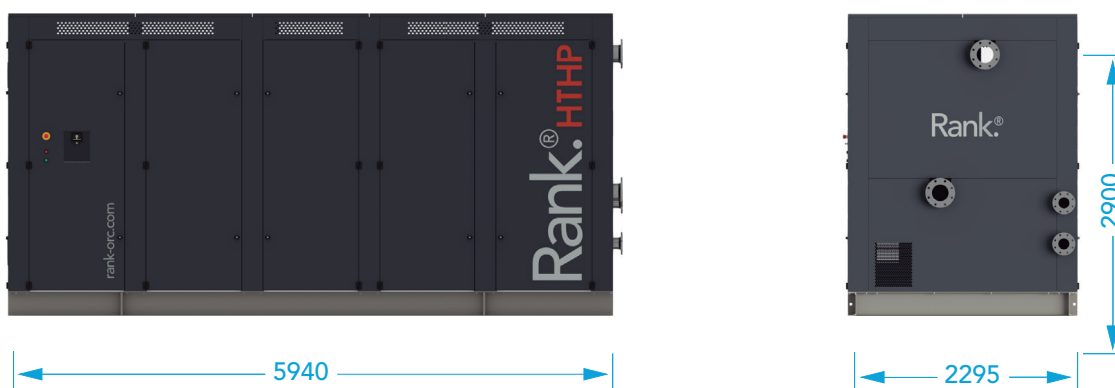

Container Option



Compliance with regulations and standards

- Low voltage Directive
- Machinery Directive
- Electromagnetic Compatibility Directive
- Pressurized Equipment Directive
- EN/ISO 3744:2010
- UNE EN 10216
- UNE EN 764-7
- UNE EN 13136:2014+A1
- 2006/42/CE
- 2014/68/UE
- ASME B31.1 / ASME B31.3 – Process Piping Code
- ASME Boiler and Pressure Vessel Code Section VIII
- UL 508A- Control Panel Wiring
- 2014/35/UE
- 2014/30/UE